


Shade Structures Canada

A subsidiary of Nirbo Inc.

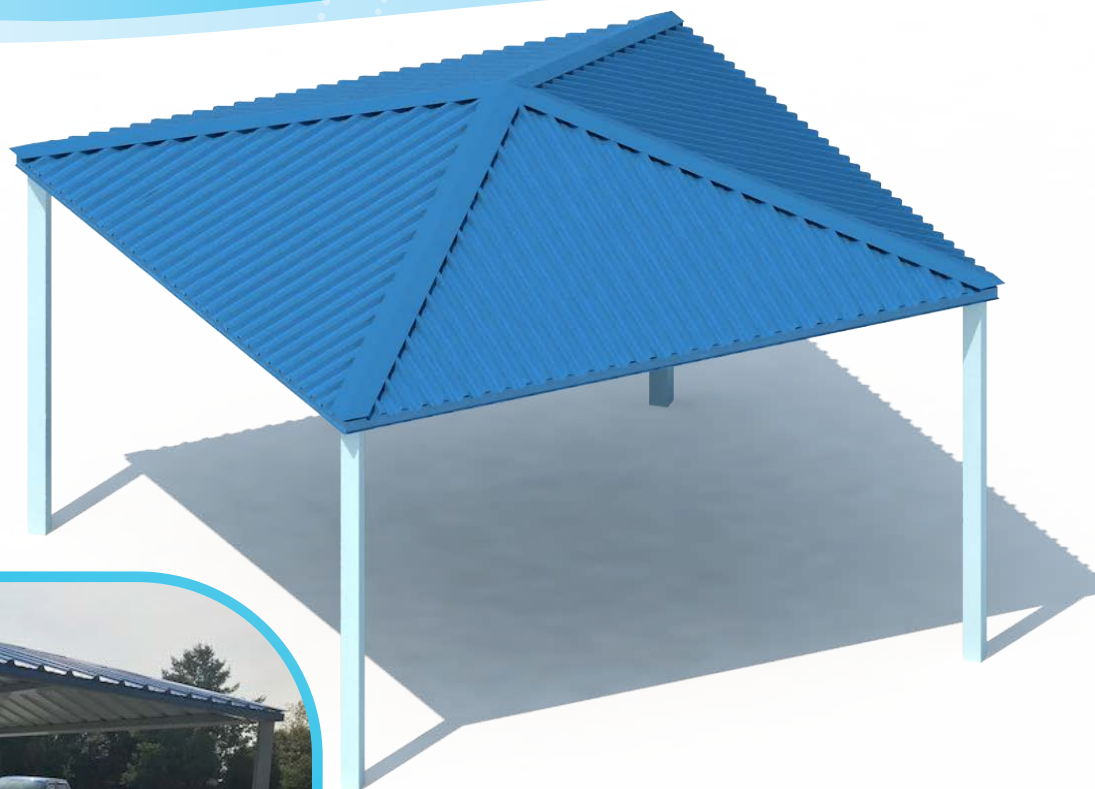

SSC Shade Structures are made of A500 Grade B Steel. Steel Structure is hot dip galvanized and powder coated.

Shade Structure 16 FT X 16 FT | S30001-01

Width	Depth	Height
192" (4.9 m)	192" (4.9 m)	145" (3.7 m)






Shade Structures Canada

2400 Lucknow Drive, Unit 39, Mississauga, ON L5S 1T9, Canada

Tel: 1.905.766.2461

Website: www.shade-structures-canada.com

Email: info@shade-structures-canada.com

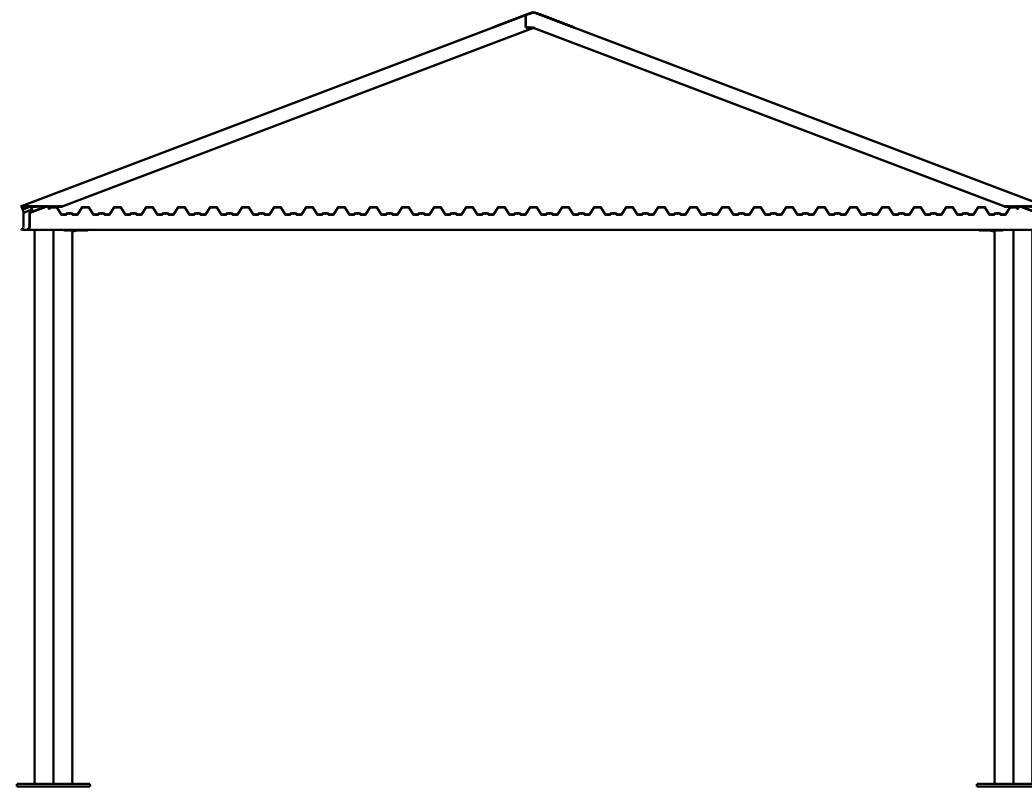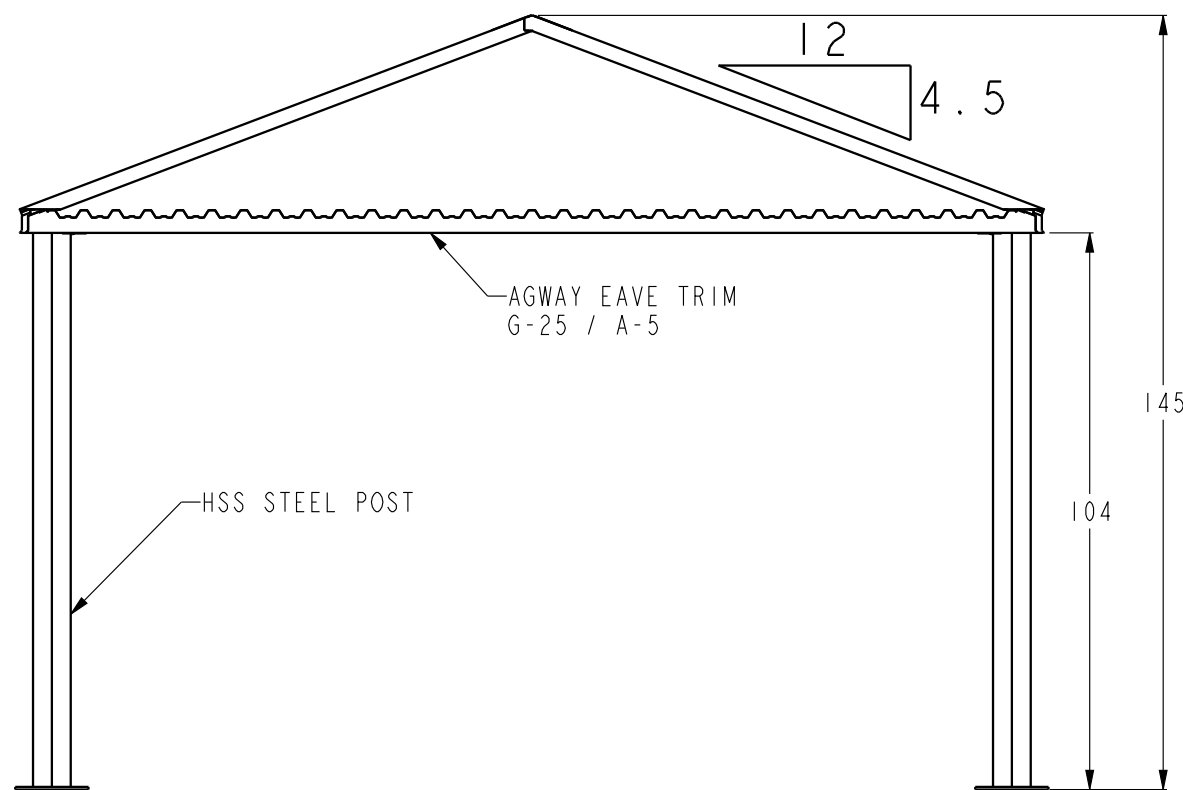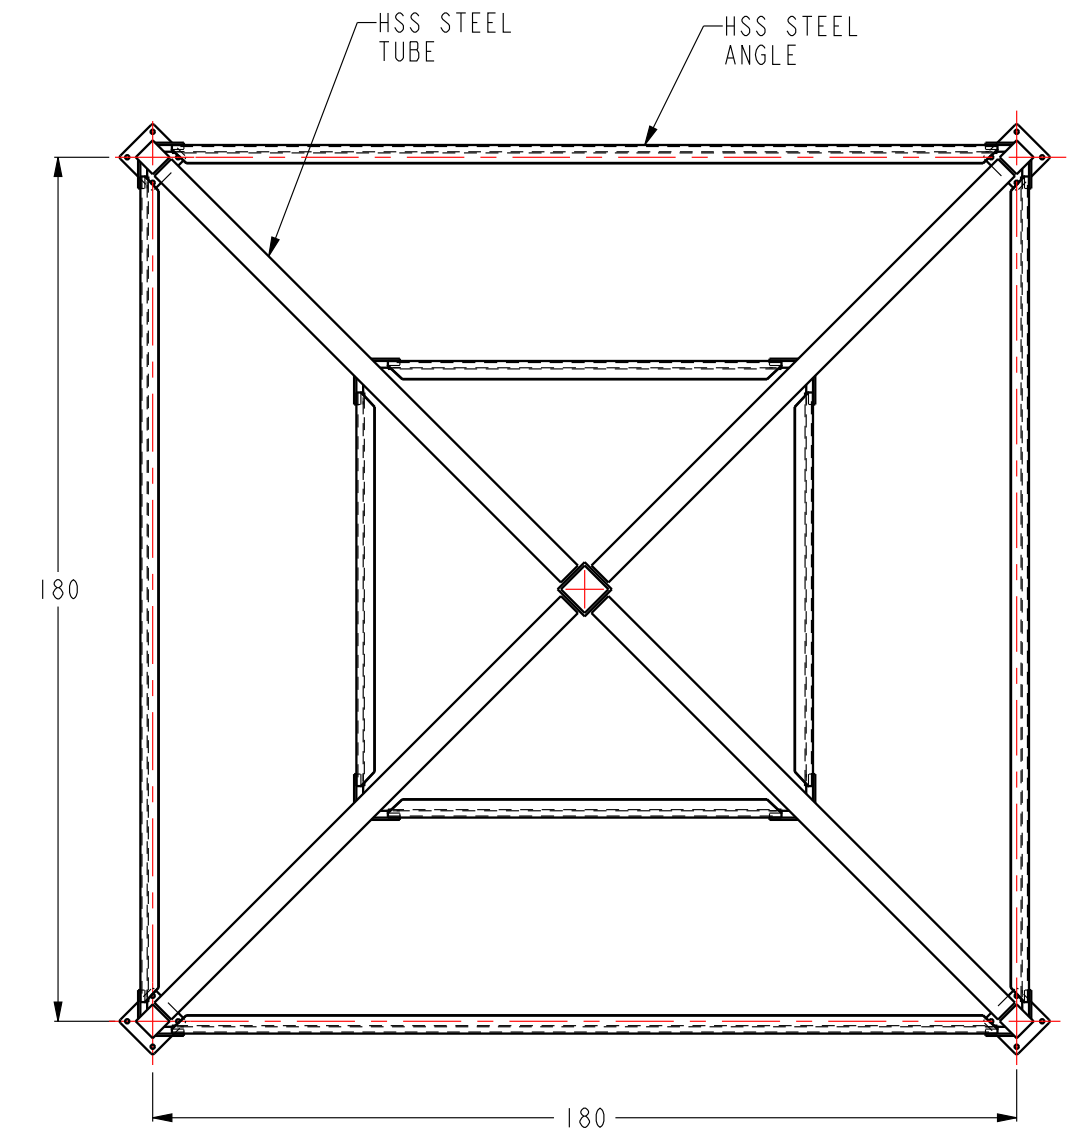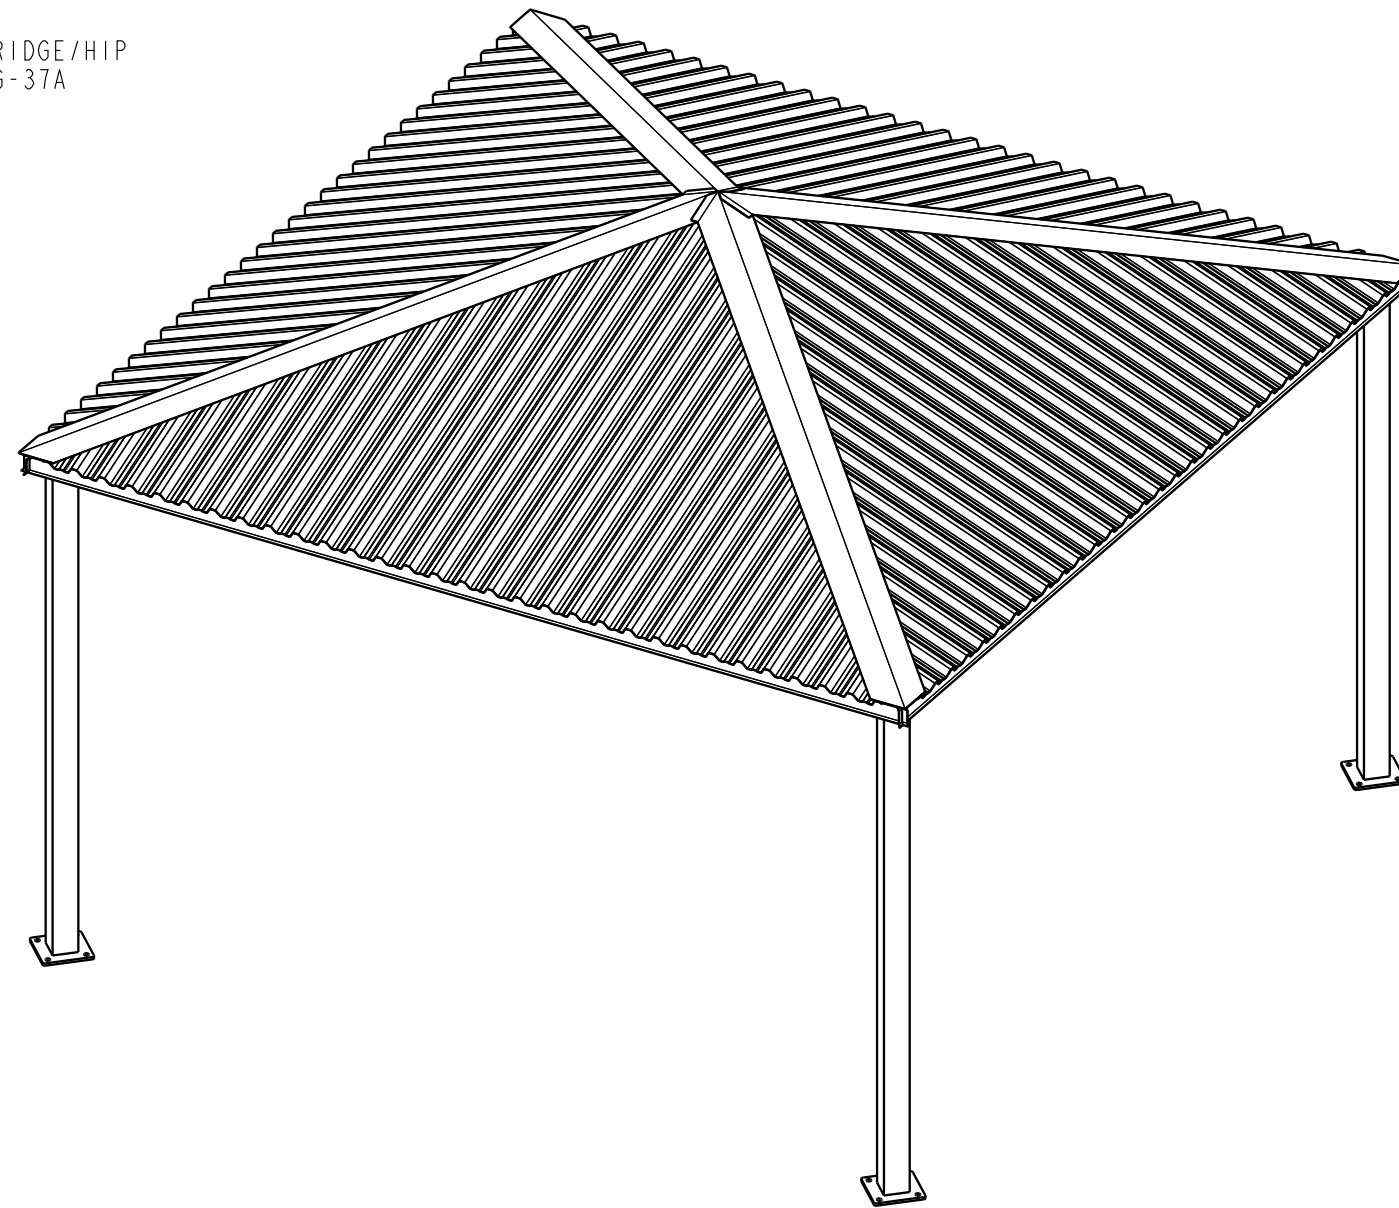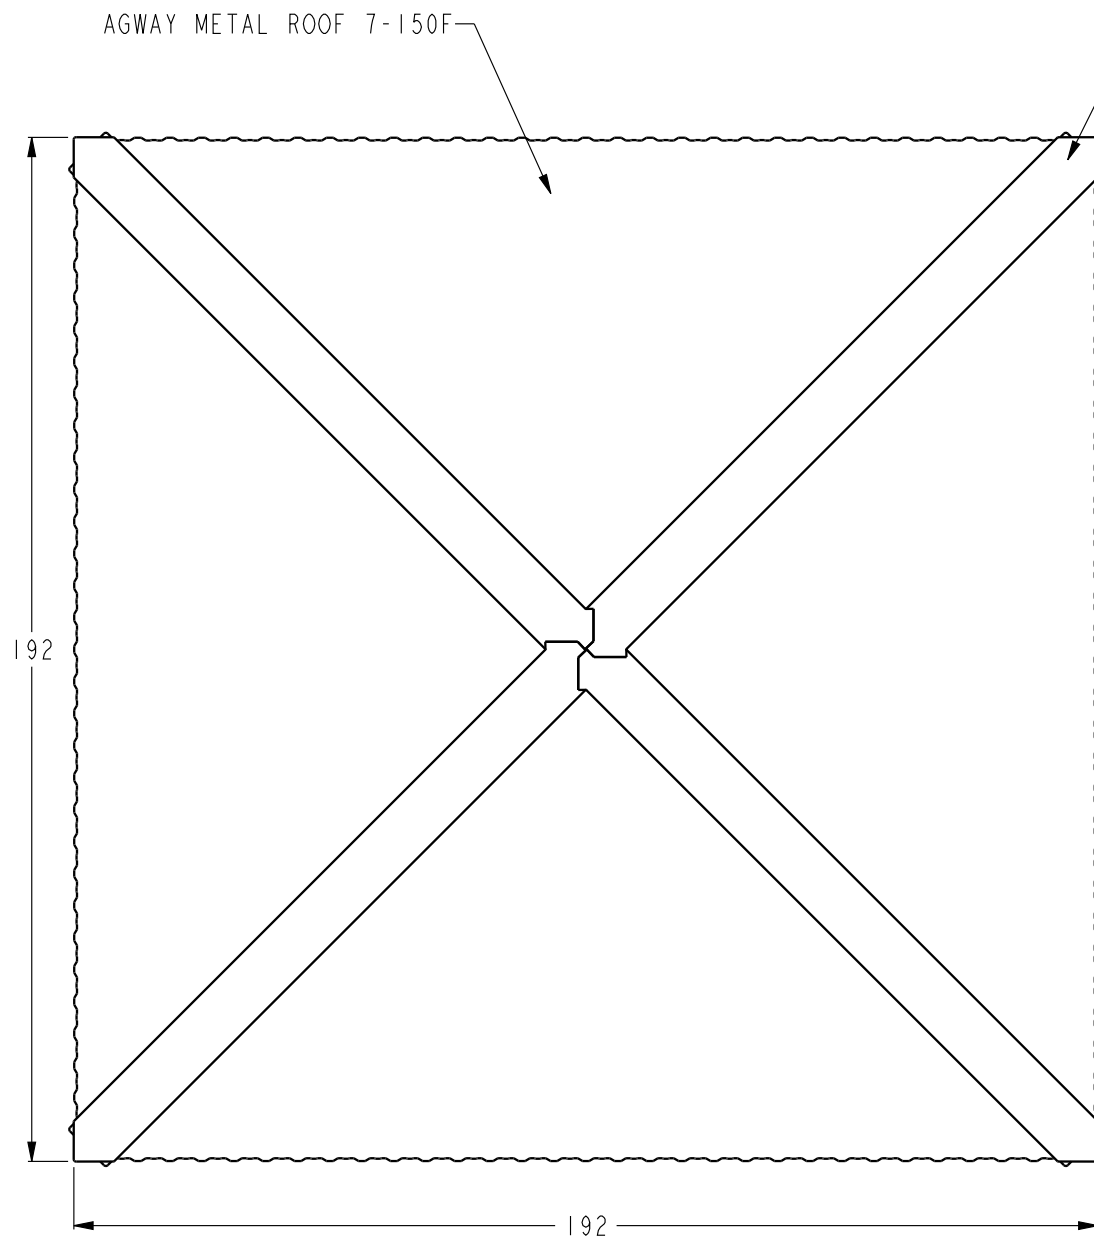


NOTES:

- 1- STRUCTURE: HSS TUBES SHALL CONFORM TO ASTM A500, GRADE B
STEEL ANGLES SHALL CONFORM TO ASTM A36
STEEL PLATE SHALL CONFORM TO ASTM A36
- 2- HARDWARE:
BOLTS SHALL CONFORM TO ASTM A325 OR EQUIVALENT
NUTS SHALL CONFIRM TO ASTM A563 OR EQUIVALENT
- 3- CONCRETE STENGTH OF FOOTING SHALL BE MINIMUM 3000 PSI
- 2- FINISH:
OPTION 1: HOT DIP GALVANIZED
OPTION 2: HOT DIP GALVANIZED AND UV RESISTANT POLYESTER POWDER COAT
- 3- ROOF PANELS: AGWAY PROFILE 7-150F - 24 GUAGE
CONFORMS TO ASTM A653 / CSA-S136-07
- 4- COMPLIANCE:
MEETS ADA ACCESSIBILITY GUIDELINES

DESIGNED BY	S. Sokmen
MODIFIED BY	S. Sokmen
APPROVED BY	S. Sokmen


ALL INFORMATION
CONTAINED IN THIS
DOCUMENT IS
PROPERTY OF
NIRBO AQUATIC INC.
AND MAY NOT BE
REPRODUCED OR
COMMUNICATED
WITHOUT PERMISSION
IN WRITING FROM
NIRBO AQUATIC INC.





UNIT	INCH
ENVIRONMENT	PRO/ENG 2001

CR NO	N/A
DATE (yyyy-mm-dd)	2019.08.21
SURFACE FINISH	µin

MATERIAL				NIRBO AQUATIC INC.		
SEE NOTE 1						
DESCRIPTION						
SHADE STRUCTURE 16 FT X 16 FT						
SHEET	SCALE	DOCUMENT	SIZE	DRAWING NO		REV
1/2	1:48	D01	C	S30001-01-D15		A

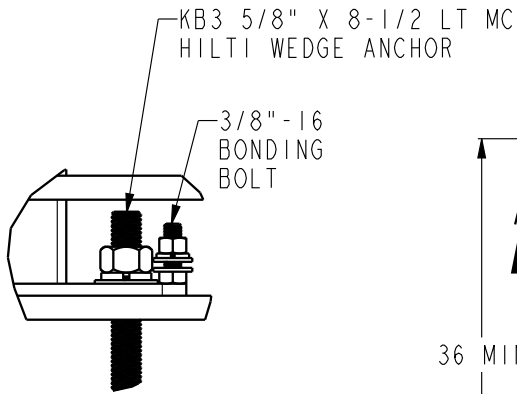

DETAIL A
SCALE 1:4

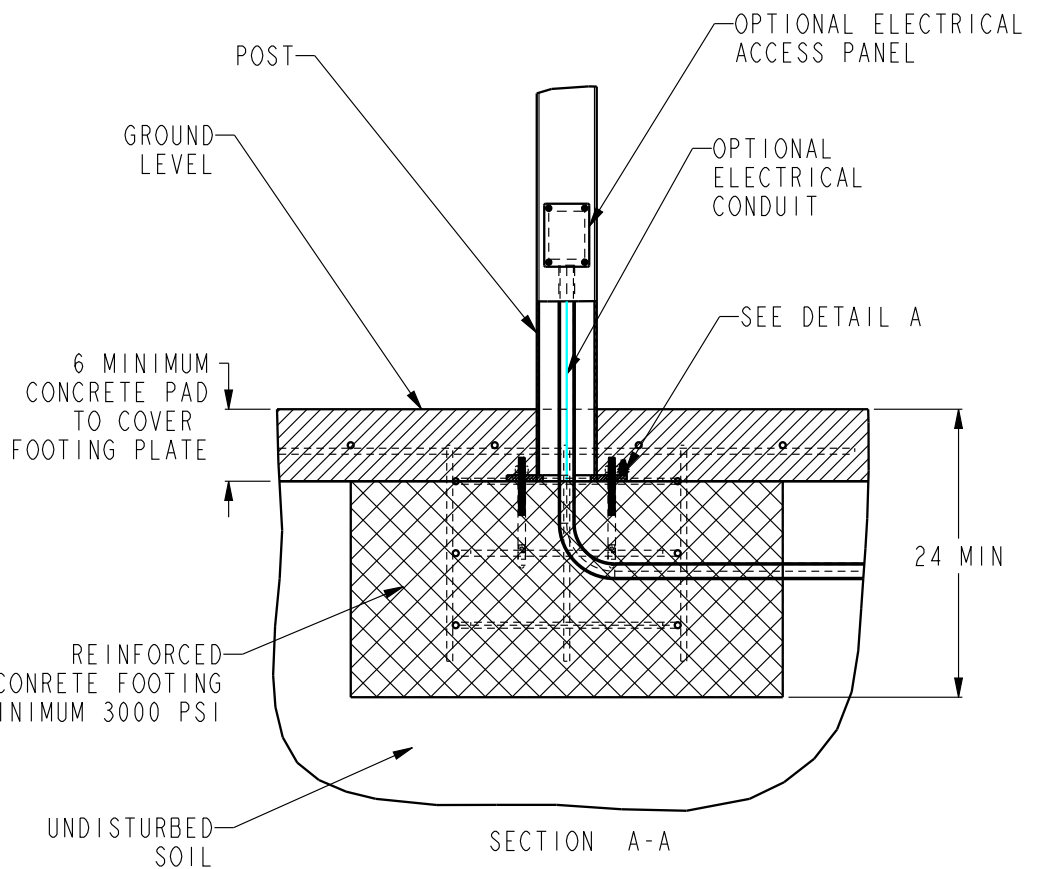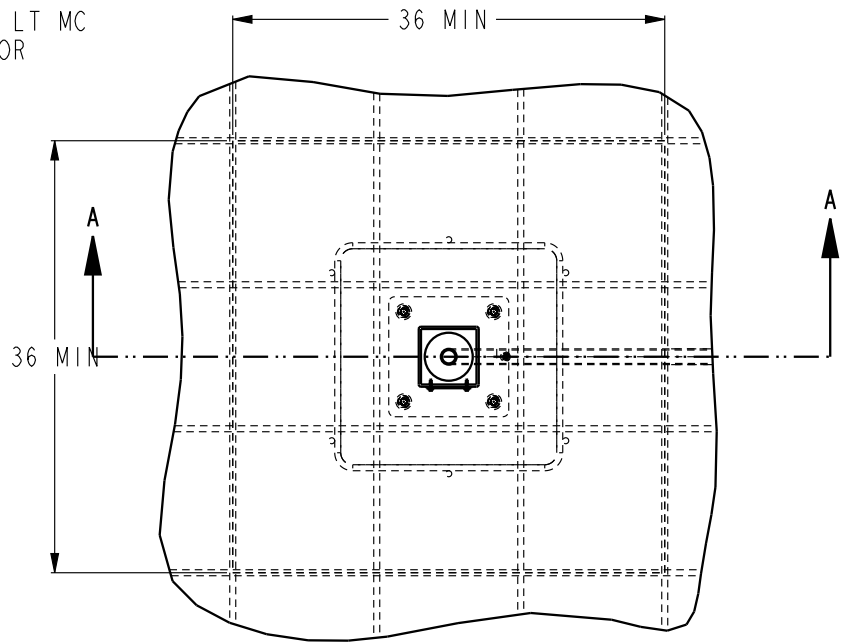

**NIRBO
AQUATIC INC.**

ALL INFORMATION CONTAINED
IN THIS DOCUMENT IS PROPERTY
OF NIRBO AQUATIC INC. AND
MAY NOT BE REPRODUCED OR
COMMUNICATED WITHOUT
PERMISSION IN WRITING FROM
NIRBO AQUATIC INC.

DATE
(yyyy.mm.dd)
2019.08.21

UNIT
INCH

SHELTER STRUCTURE FOOTING DETAIL
REFERENCE ONLY

SHEET

1 / 1

DRAWING NO

S40001-01

REV

A